




Some Assembly
not required.

WHAT'S INCLUDED

All of the following components are included in your custom ITC One:

- Vidikron Video Processor
 - Bryston™ Digital Surround Processor
 - ICEpower High End D-Class Amplifiers
 - Netlinx® Control system
 - Transparent Cable Power Conditioning
 - Microsoft® Xbox 360™
 - Apple® Ipod™ video dock
 - HD DVR from DirecTV®, Dish®, or Comcast®
 - SE2 RF System Remote Control
 - Super Quiet Cooling System
 - 4.3 Front Touch Screen
 - Anti-Noise and Vibration System
 - Super Easy 2 Connect Rear Panel
 - Transparent Cable Harness
 - Apple TV® (optional)
 - Blu-ray™ Disc Drive (optional)
 - Nintendo® Wii™ (optional)
- More...



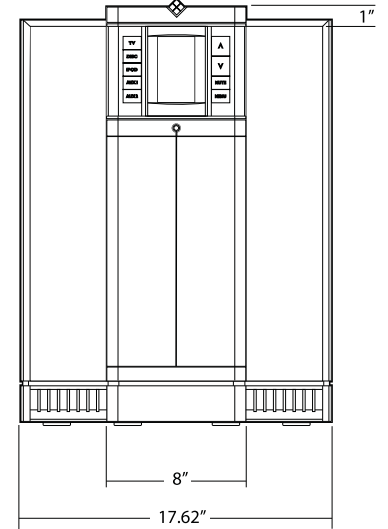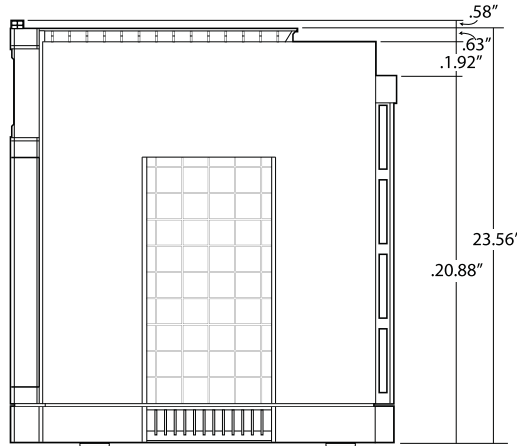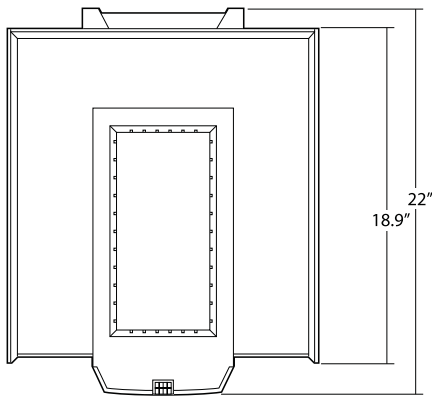

ITC ONE

Custom build your home theater system today with the SE2 Labs' ITC One. The first fully personalized and integrated, high-end home entertainment console.

STANDARD AMPLIFIER

Power output 125W @ 0.2% THD+N (10 Hz - 20 kHz, 4)
Short term maximum power v290W (10% THD+N / 4 , 230V AC)
Efficiency 79% @ 125W / 4
Full audio bandwidth 65kHz / 8
Dynamic range 110dB
THD+N 0.008% @ 1W / 100Hz
Idle noise 90 µV
Options: 200W, 400W

SURROUND PROCESSOR FORMAT

5.1, 6.1, 7.1
Processes Dolby®, DTS®, THX®, and PCM formats: Dolby® Digital, Dolby® Pro Logic and Pro Logic IIx, DTS-ES Discrete 6.1, DTS-ES® Matrix 6.1, DTS™ Neo:6, THX® Surround EX™, THX® Ultra certified, PCM 32kHz, 44kHz, 48kHz, 96kHz sample rates.

STANDARD DISC FORMAT

Support for DVD-Video, DVD-ROM, DVD-R/RW, DVD+R/RW, CD-DA, CD-ROM, CD-R, CD-RW, WMA CD, MP3 CD, JPEG Photo CD

iPOD™ DOCK WORKS WITH

- All iPod products *
*6 gen. audio only

OUTPUTS

Multi Room out – Analog R&L
Display – HDMI (DVI or component also available)
Subwoofer – Analog RCA line level
Speaker outputs – Front L/R, Center & Sub,
Side L/R, Rear L/R.
* 4 Neutrik® NL4FX Speakon connectors included

INPUTS REAR

TV Signal A/B

AUXILIARY 1

- Audio – Analog R&L / Digital SPdif
- Video – Component / HDMI

AUXILIARY 2

- Audio – Analog R&L
- Video – Composite
Network- RJ45
Phone – RJ45 (will except RJ11)
Display Control – RJ45 for SE2 Displays
12v Trigger- 1 1/4mini for screen control
RS-232 – DB-9 (for control from outside control system)
Misc. Control – 6 pin Phoenix (custom applications)
Power 110/120v AC 60Hz

INPUTS FRONT

2 Xbox Controller USB ports
Auxiliary 1 (shared with rear)
- Audio – Analog R&L / Digital SPdif
- Video – Component / HDMI
Ethernet Port

Auxiliary 2 (shared with rear)

- Audio – Analog R&L
- Video – Composite
Aux AC Power outlet (for small devices only)

GENERAL

Dimension- H24.25"xW17.75"D22"
Weight 120lbs (base system)
Power Consumption
600watts (max in standard config)
95watts Standby

Visit us at www.Se2labs.Com today or call us at 801-523-2600 for dealer information